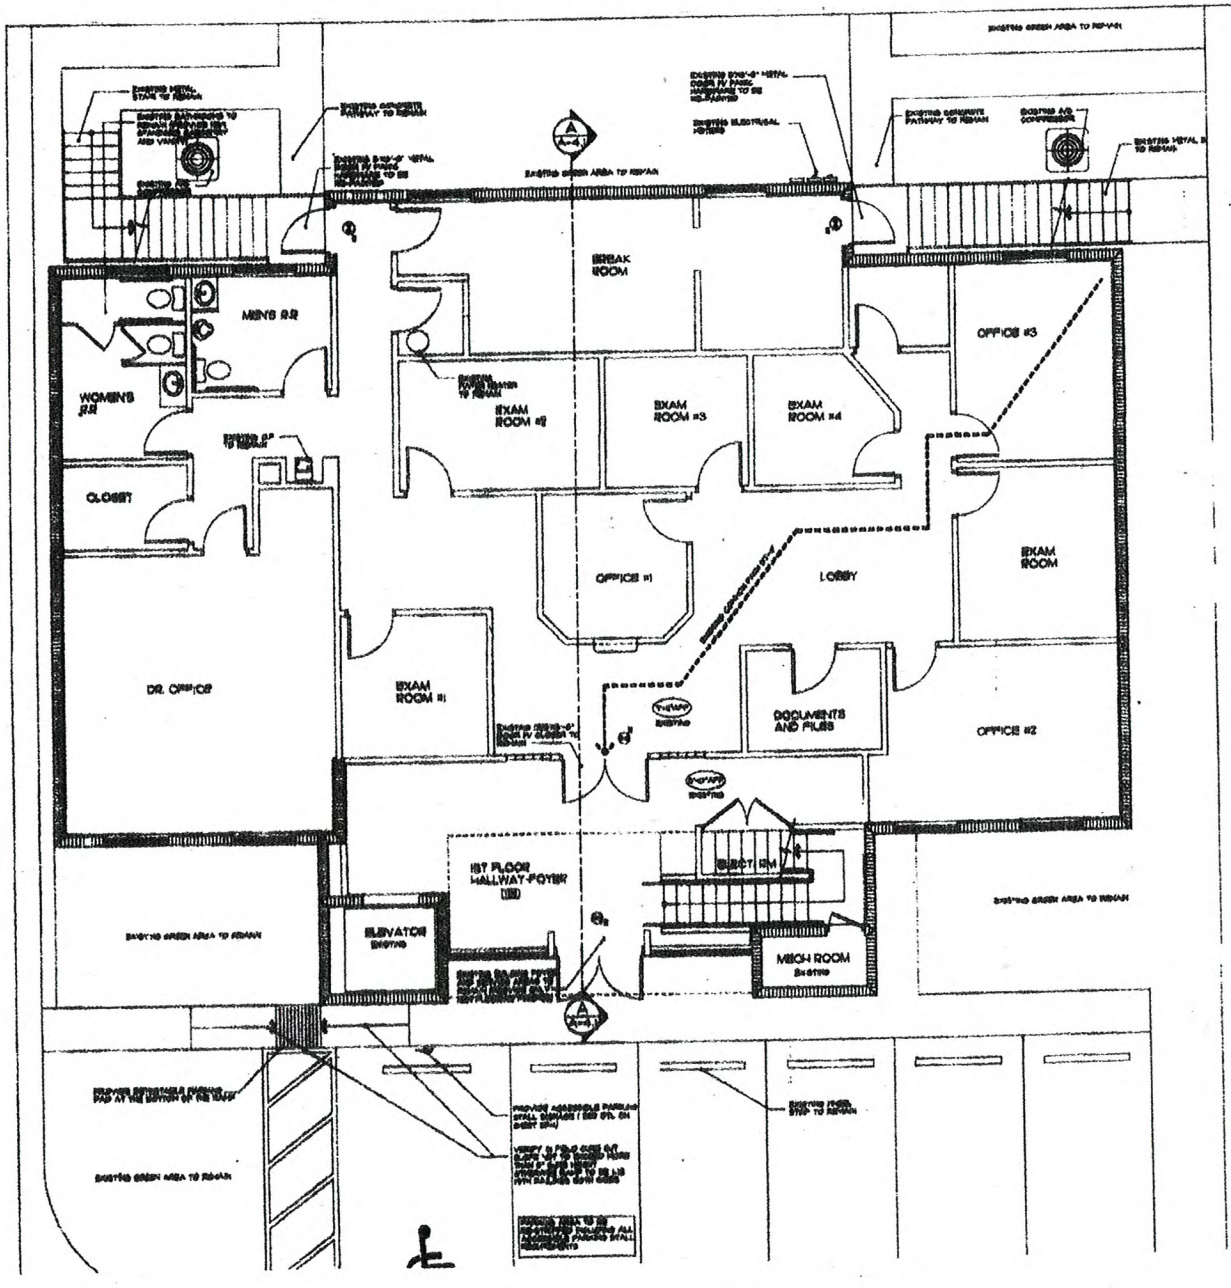

FLOOR PLAN NOTES:

1. PROVIDE 5/8" WOOD BACKING AT KITCHEN AND OTHER CASEWORK.
2. EVERY BATHROOM DOOR LOCK SHALL BE DESIGNED TO ALLOW THE OPENING OF THE LOCKED DOOR FROM THE OUTSIDE IN AN EMERGENCY. (SFPA - 8.3.4.A)
3. SURROUNDING MATERIALS (SECTION 1210)
4. GAF. A SAFETY GLASS SHALL BE USED AT ALL SHOWER/TUB ENCLOSURES INCLUDING WINDOWS WITH SILLS LOWER THAN 60" AND DOORS IN THE TUB
5. BATHTUB AND SHOWER FLOORS AND WALLS ABOVE BATHTUBS WITH TUB FILLER SHOWER HEADS AND IN SHOWER COMPARTMENTS SHALL BE FINISHED WITH A NONABSORBENT SURFACE. SUCH WALL SURFACES SHALL EXTEND TO A HEIGHT OF NOT LESS THAN 6 FEET ABOVE THE FLOOR.
6. ALL INTERIOR PARTITIONS SHALL BE 5/8" TYPE 'X' GYP. BOARD ON 3 5/8" METAL STUDS @ 16" O.C. UNLESS NOTED OTHERWISE. ALL GYP. BOARD SHALL BE INSTALLED VERTICAL REMOVING PLENUM WHERE NOTED.
7. ALL FURNITURE EQUIPMENT TO BE SUPPLIED AND INSTALLED BY OWNER
8. SEE OVERALL SITE PLAN SHEET SP-1 FOR VICINITY INFORMATION

INTERIOR FINISHES FLAME SPREAD CLASSIFICATION

WALL & SYMBOL LEGEND:

NOTE

EXISTING FINISH FLOOR ELEVATION TO STAY AS EXISTING

LIFE SAFETY DATA

LIFE SAFETY LEGEND

CONCEPT DESIGN STUDIO

ANA MARIA BEEDE
DESIGN CONSULTANT

REVISIONS	BY

DERMATOLOGY CENTER ALTERATION/RENOVATION

OCT 27 [illegible]

Job No
Project Manager
Drawn by
Scale
Date

SHEET No.