

850 SE 7th STREET
DEERFIELD BEACH
FLORIDA 33441
phone 305 421 8570

**allen
davis
architect**
incorporated


COMMERCIAL BUILDING
AT SOUTH BEACH
PEERFIELD BEACH, FLORIDA

DATE
12-8
CITY
CINCINNATI


DATE
9-22-83
SCALE
114-1-1
JOB NO.
B14-83
SHEET

2

OF 6 SHEETS

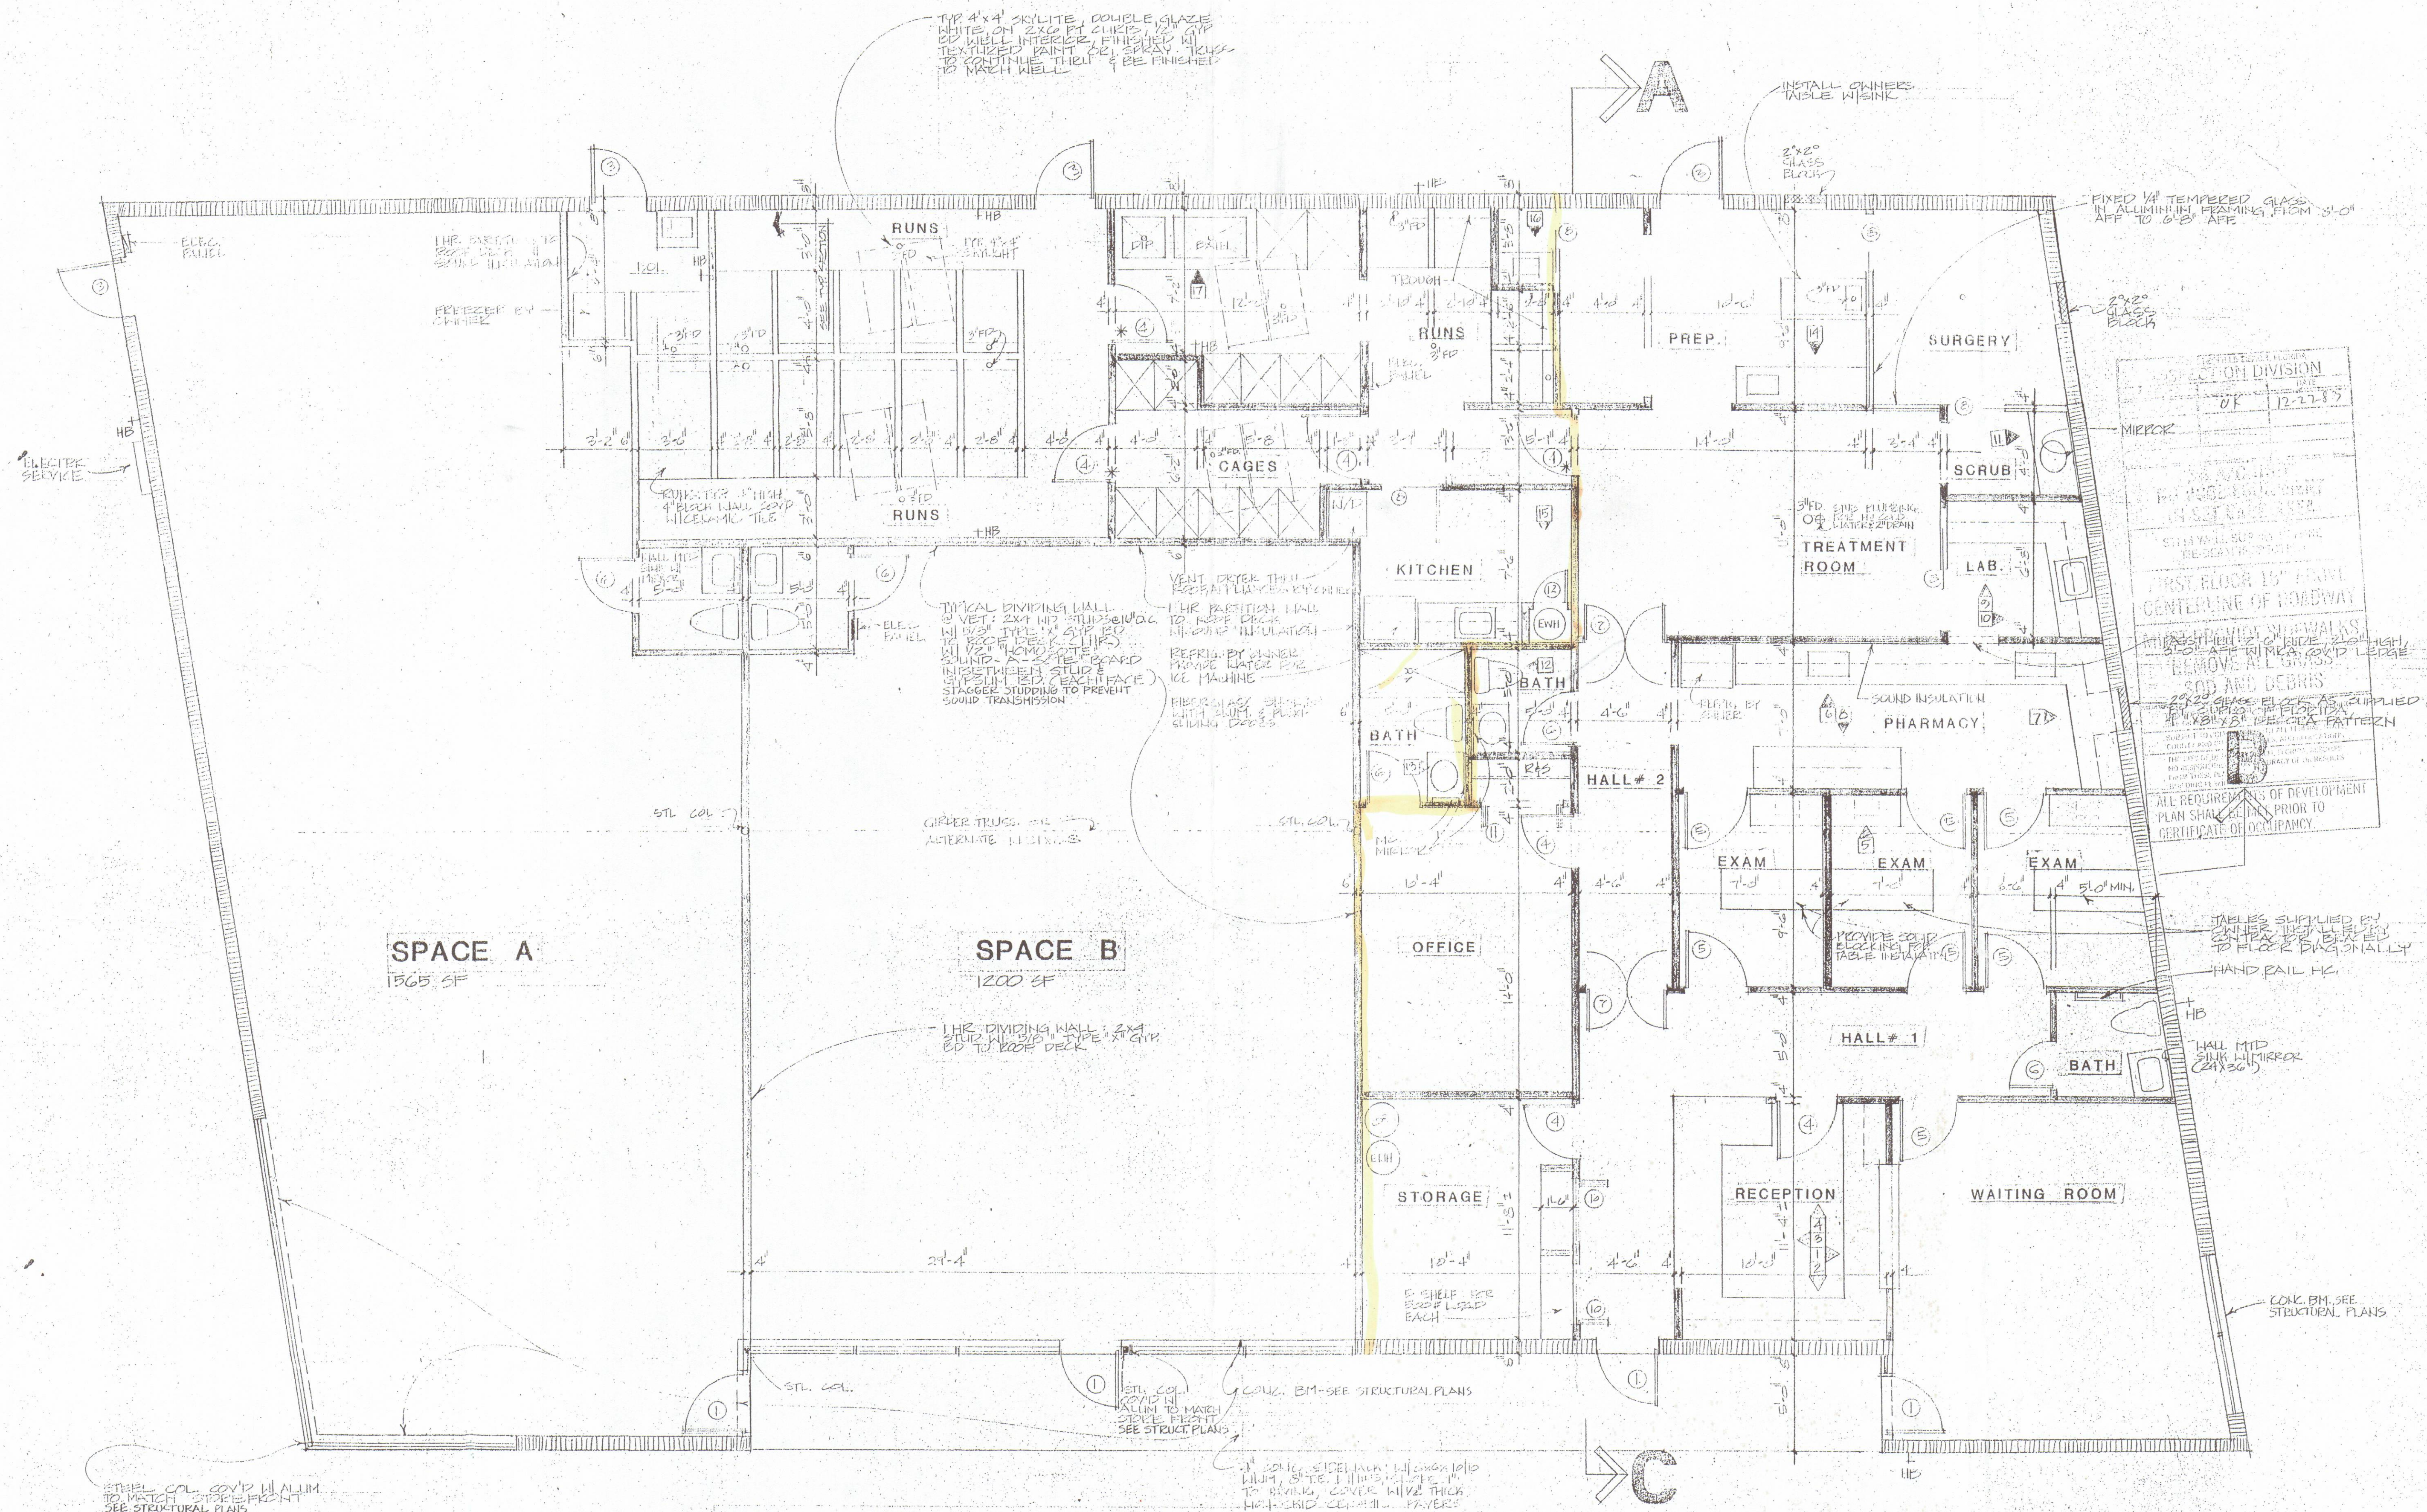

FLOOR PLAN

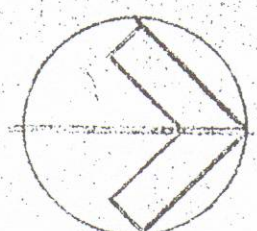

SEE INTERIOR ELEVATION
DRAWING #7

JAN. SCHEDULE (*Denotes 12"x20" Glass Light)							
NO.	SIZE	TYPE	FINISH	FRAME	SADDLE	HWR	REMARKS
1	36"x94"x13 1/4"	A&G	Black	Alum	Alum	Lock	
3	36"x80"x13 1/4"	HM	Paint	HM	Alum	Lock	10"x20" Fixed Light
4	36"x80"x1-3/8"	SCWD	Stain	Wood	---	Lock	W/ CLOSURE
5	36"x80"x1-3/8"	HCWD	Stain	Wood	---		
6	28"x80"x-1/38"	HCWD	Stain	Wood	Marble	Privacy	
7	(2) 24"x80"x1-3/8"	SCWD	Stain	Wood	---	---	Double Acting, L.C.
8	36"x80"x1-3/8"	HCWD	Stain	Wood	---	Lock	Pocket Slider
9	24"x80"x1-3/8"	HCWD	Stain	Wood	---	---	Pocket Slider
10	36"x80"x1-3/8"	HCWD	Stain	Wood	---	---	Bi-Fold
11	48"x80"x1-3/8"	HCWD	Stain	Wood	---	---	Bi-Fold
12	24 1/2" x 80" x 1-3/8"	LXNFER	STAIN	WOOD	---	---	

FINISH SCHEDULE					
ROOM	FLOOR	BASE	WALLS	CEILING	HT
Waiting	Carpet	Vinyl	Paint	ACT 1	8'-0"
Bathrooms	Cer.Tile	Cer.Tile	Paint	Paint	8'-0"
Reception	Carpet	Vinyl	Paint	ACT 1	8'-0"
Hall 1	VAT	Vinyl	Paint	ACT 1	8'-0"
Exam	Cer.Tile	Cer.Tile	Paint	ACT 2	8'-0"
Storage	VAT	Vinyl	Paint	ACT 1	8'-0"
Office	Carpet	Vinyl	Paint	ACT 1	8'-0"
Pharmacy	Cer.Tile	Cer.Tile	Paint	ACT 2	8'-0"
Hall 2	Cer.Tile	Cer.Tile	Paint	ACT 2	8'-0"
Treatment	Cer.Tile	Cer.Tile	Paint	ACT 2	8'-0"
Kitchen	Cer.Tile	Cer.Tile	Paint	ACT 2	8'-0"
Lobby	Cer.Tile	Cer.Tile	Cer.Tile	ACT 2	8'-0"

Room	Floor	Base	Walls	Ceiling	HT
Surgery	Cer.Tile	Cer.Tile	Cer.Tile	ACT 2	8'-0"
Prep.	Cer.Tile	Cer.Tile	Cer.Tile	ACT 2	8'-0"
Runs	Cer.Tile	Cer.Tile	Cer.Tile	ACT 2	8'-0"
Cages	Cer.Tile	Cer.Tile	Cer.Tile	ACT 2	8'-0"
Isolation	Cer.Tile	Cer.Tile	Cer.Tile	ACT 2	8'-0"
Scrub	Cer.Tile	Cer.Tile	Cer.Tile	ACT 2	8'-0"

FINISH SCHEDULE SPACES "A" & "B"

Sales	---	---	Paint	ACT 1	8'-0"
Toilet	VAT	Vinyl	Paint	ACT 1	8'-0"